


Other Cables

EPR Rubber Insulated Polychloroprene Sheathed Flexible Cable (H07RN-F)

CU/RUBBER/POLYCHLOROPRENE

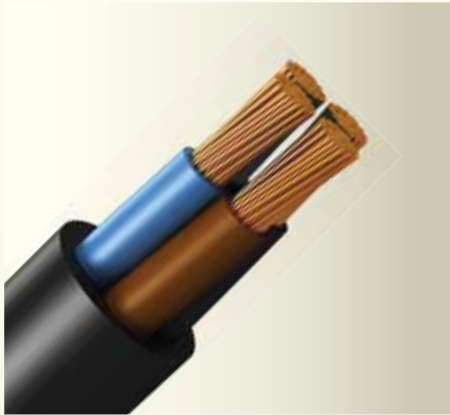

Application :	This flexible power cable can be installed either as a fixed or mobile cable under adverse conditions such as in an oily, acidic or alkaline environment.
Voltage Rating :	450/750V
Construction :	Class 5 plain annealed flexible copper, rubber insulated, polychloroprene sheathed cable
Insulation Colour :	Single core : Black 2-Core : Brown & Blue 3-Core : Brown, Blue & Green/Yellow 4-Core : Brown, Blue, Black & Green/Yellow 5-Core : Brown, Blue, Black, Black & Green/Yellow
Sheath Colour :	Black
Operating temperature :	-25 deg C to +60 deg C

Conductor		Insulation	Sheath	Outer Dia. (mm)	Approx. weight (kg/km)
Nominal Area (mm ²)	Max. Dia. Of wire in conductor (mm)	Thickness (mm)	Thickness (mm)		
1x1.5	0.26	0.8	1.4	6.0	50
1x2.5	0.26	0.9	1.4	6.5	65
1x4	0.31	1.0	1.5	7.5	90
1x6	0.31	1.0	1.6	8.5	115
1x10	0.41	1.2	1.8	10.0	180
1x16	0.41	1.2	1.9	11.5	255
1x25	0.41	1.4	2.0	13.0	365
1x35	0.41	1.4	2.2	15.0	485
1x50	0.41	1.6	2.4	17.0	680
1x70	0.51	1.6	2.6	19.0	900
1x95	0.51	1.8	2.8	21.5	1160
1x120	0.51	1.8	3.0	23.5	1460
1x150	0.51	2.0	3.2	25.5	1800
1x185	0.51	2.2	3.4	28.5	2200
1x240	0.51	2.4	3.5	31.5	2830
1x300	0.51	2.6	3.6	34.0	3480
1x400	0.51	2.8	3.8	38.5	4500
1x500	0.61	3.0	4.0	44.0	5800
2x1	0.21	0.8	1.3	8.3	90
2x1.5	0.26	0.8	1.5	9.2	115
2x2.5	0.26	0.9	1.7	11.0	165
2x4	0.31	1.0	1.8	12.6	230
2x6	0.31	1.0	2.0	14.2	300
2x10	0.41	1.2	3.1	19.2	545
2x16	0.41	1.2	3.3	22.0	765
2x25	0.41	1.4	3.6	25.4	1090

Other Cables

EPR Rubber Insulated Sheathed
Flexible Cable (H07RN-F)
CU/RUBBER/POLYCHLOROPRENE



tel (65) 6367 0107 fax (65) 6365 2963
www.keystone-cable.com

Conductor		Insulation	Sheath	Outer Dia. (mm)	Approx. weight (kg/km)
Nominal Area (mm ²)	Max. Dia. Of wire in conductor (mm)	Thickness (mm)	Thickness (mm)		
3X1	0.21	0.8	1.4	9.0	110
3X1.5	0.26	0.8	1.6	10.0	140
3X2.5	0.26	0.9	1.8	12.0	200
3X4	0.31	1.0	1.9	13.5	280
3X6	0.31	1.0	2.1	15.5	375
3X10	0.41	1.2	3.3	20.5	675
3X16	0.41	1.2	3.5	23.5	950
3X25	0.41	1.4	3.8	27.5	1360
3X35	0.41	1.4	4.1	30.5	1795
3X50	0.41	1.6	4.5	35.0	2480
3X70	0.51	1.6	4.8	39.0	3285
3X95	0.51	1.8	5.3	45.3	4210
3X120	0.51	1.8	5.6	49.0	5280
3X150	0.51	2.0	6.0	60.0	6420
4X1	0.21	0.8	1.5	10.0	135
4X1.5	0.26	0.8	1.7	11.0	170
4X2.5	0.26	0.9	1.9	13.0	250
4X4	0.31	1.0	2.0	15.0	350
4X6	0.31	1.0	2.3	17.0	470
4X10	0.41	1.2	3.4	22.5	830
4X16	0.41	1.2	3.6	25.5	1170
4X25	0.41	1.4	4.1	30.0	1700
4X35	0.41	1.4	4.4	34.0	2300
4X50	0.41	1.6	4.8	39.0	3160
4X70	0.51	1.6	5.2	43.5	4200
4X95	0.51	1.8	5.9	50.0	5450
4X120	0.51	1.8	6.0	54.0	6770
5X1	0.21	0.8	1.6	11.0	160
5X1.5	0.26	0.8	1.8	12.0	205
5X2.5	0.26	0.9	2.0	14.5	300
5X4	0.31	1.0	2.2	16.5	420
5X6	0.31	1.0	2.5	19.0	580
5X10	0.41	1.2	3.6	25.0	1120
5X16	0.41	1.2	3.9	28.0	1440
5X25	0.41	1.4	4.4	33.5	2120